


### 6.3.1.3 Interlock Cable 64

<Removal>


- 1.** Remove the (5) side cover (right), (3) top cover (right), (10) ink cover (rear right), (4) side cover (left), (2) top cover (left), and (9) ink cover (rear left).
- 2.** Remove the screw holding the interlock microswitch and remove the Interlock Cable 64.



Green: 36V interlock switch  
Red: F/W interlock switch

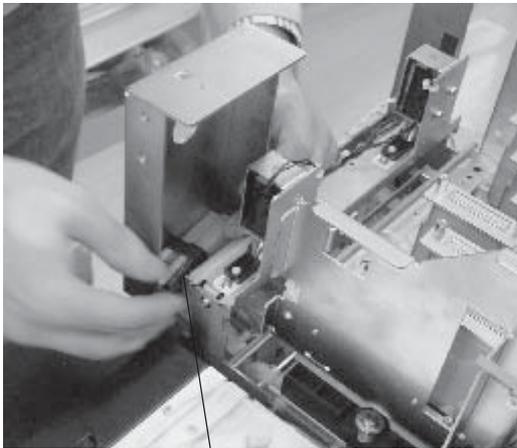

Interlock Cable 64

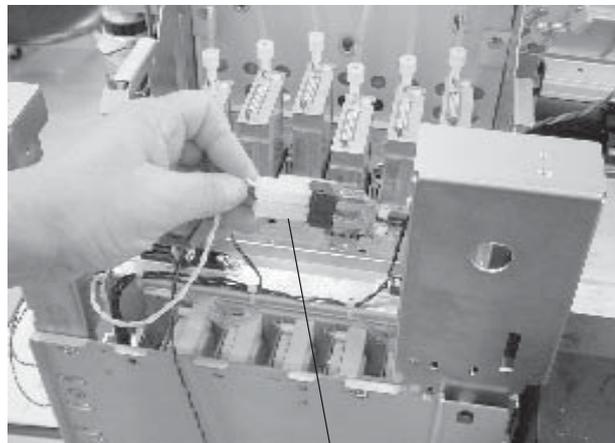

Interlock Cable 64

#### NOTE

The bracket located the inside of the Interlock Cable 64 drops by removing the screws holding the micro switch.