

Replacing Mutoh head fuse for under \$10.00.

Radio shack parts



The Wirewound resistor you will eventually throw away but you need the extra long wires and you will also need them as a stand to hold up the fuse holder.

You need a low wattage solder iron such as this one.



Solder the wire from the resistor to the fuse holder




Cut off resistor and throw it away. Use other wires from the other resistors to make fuse holder longer.



Locate F2 head fuse.



Once located use solder gun to build up the solder on both sides of the fuse so the wires will have something to solder to. Don't worry about removing old fuse as it is bad and not necessary. See picture and see mound of solder.

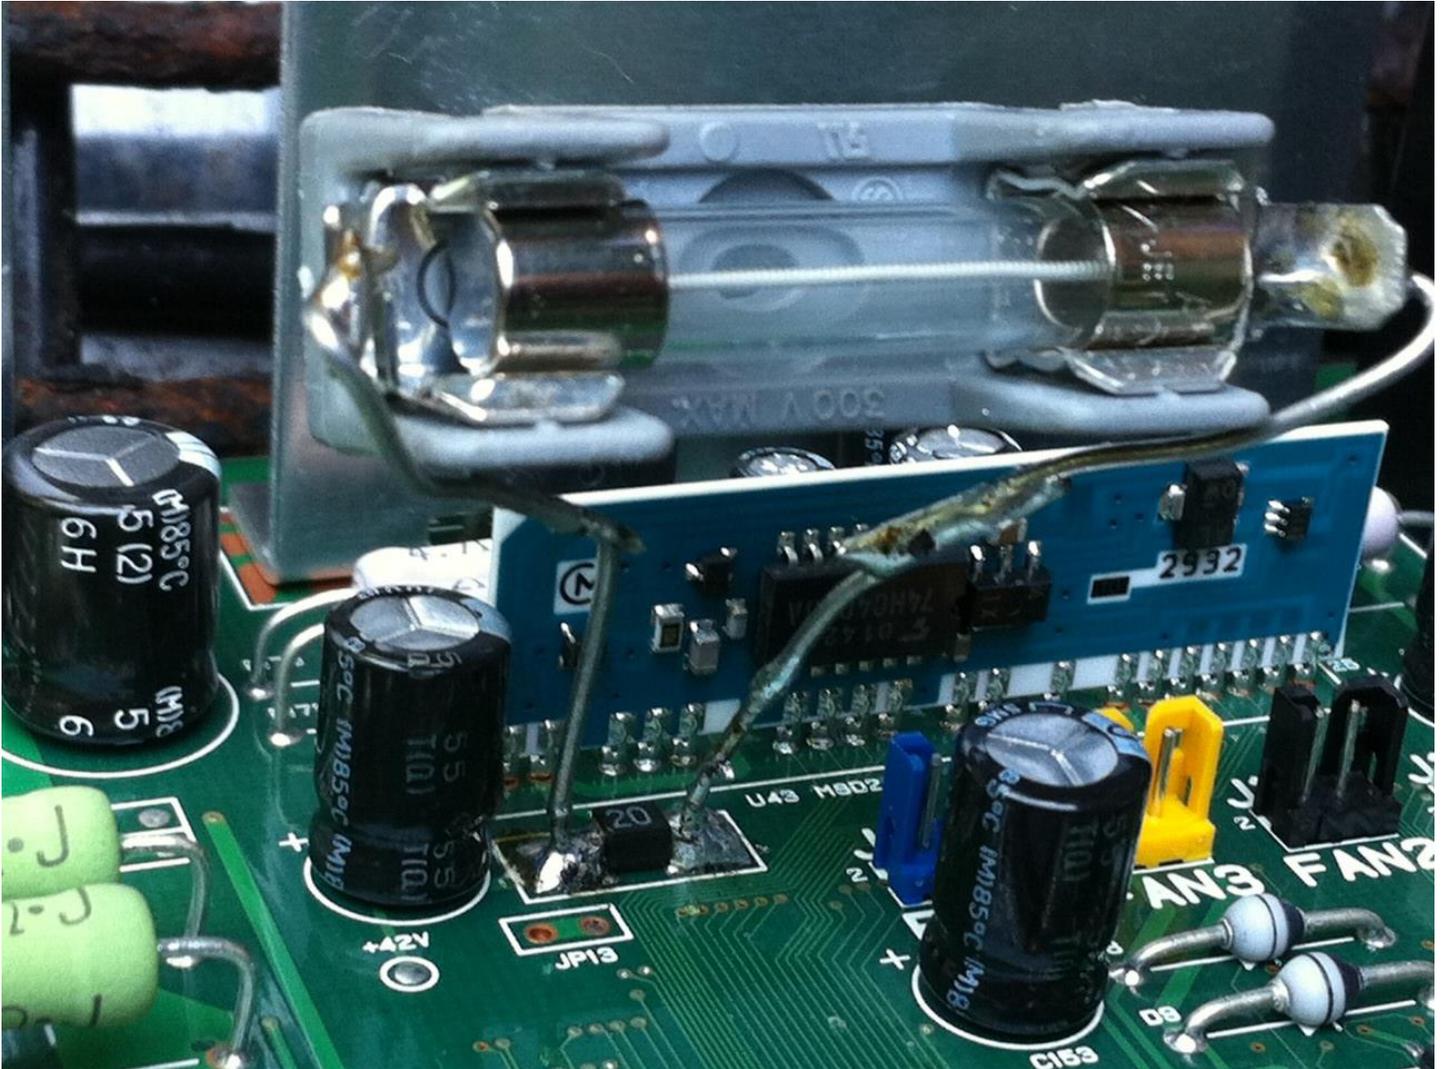

Add fuse and you are ready to reassemble.

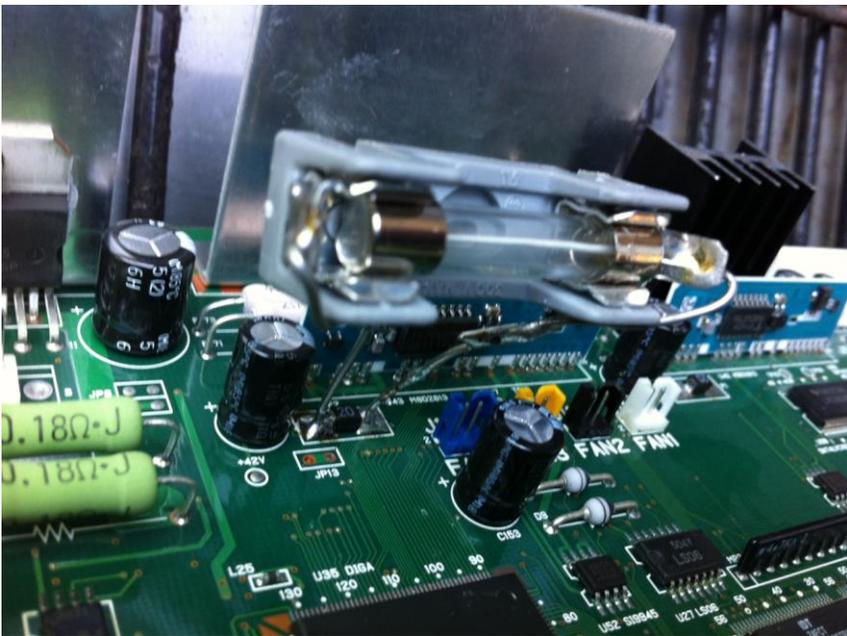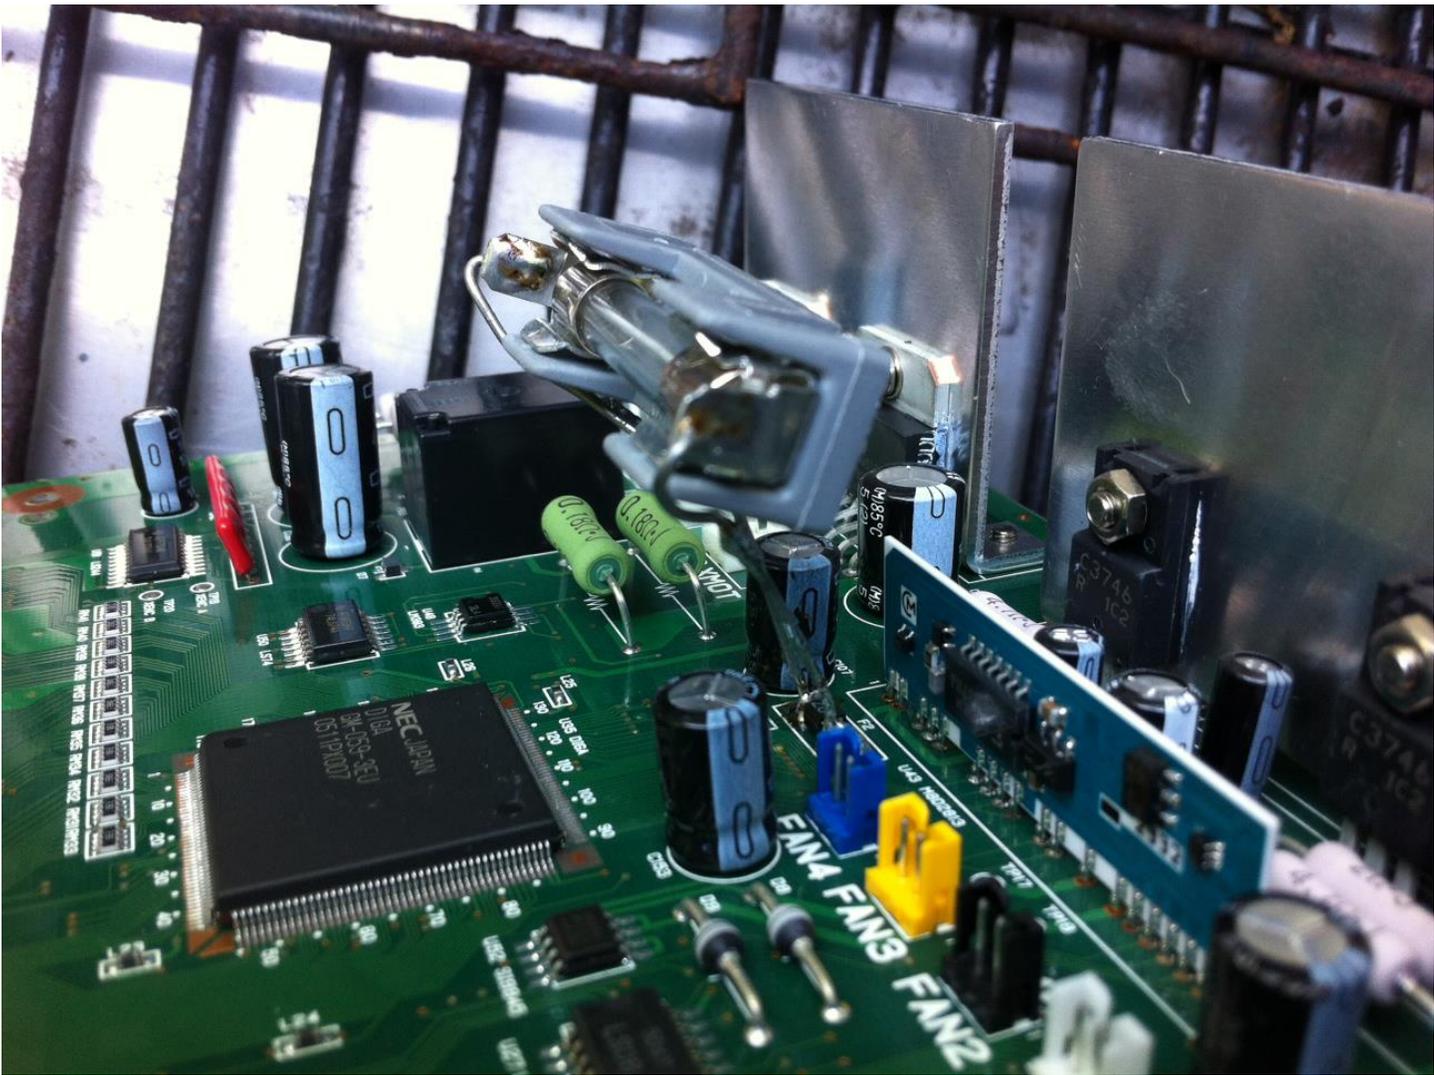

Mutoh head fuse Replacement

<http://www.signs101.com/forums/showthread.php?80531-Print-Head-Fuses&highlight=head%20fuse>